

**DELHI URBAN SHELTER IMPROVEMENT BOARD
GOVERNMENT OF N.C.T. OF DELHI
OFFICE OF THE EXECUTIVE ENGINEER, C-1
011-25454271**

NIQ No.04/EEC-1/DUSIB/2018-19/D-282

Dated: 06-07-2018

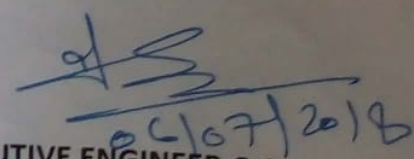
NOTICE INVITING QUOTATION

Executive Engineer,C-1, DUSIB on behalf of Delhi Urban Shelter Improvement Board invites quotations from intending agencies on percentage rates basis in sealed cover for the following works:-

SL. NO	Name of work	Estimated Cost	Time of Completion
1.	N.O.W: Pay & Use JSC, SH: Construction of Ramp and Miscellaneous work in JSCs of AC-31 Vikaspuri.	Rs. 46276.87	15 days

The quotations shall reach the office of the Executive Engineer,C-1, DUSIB, Raja Garden, New Delhi-110027 latest by 3.00 PM on 09.07.2018 which shall be opened on 09.07.2018 at 3.30 PM in the presence of intending quotationers or their representatives. The intending quotationers may collect the schedule of quantities on DUSIB website and other information from the office of the Executive Engineer,C-1, DUSIB. The terms & Conditions of the quotation are as follows:-

1. The work shall be carried out as per CPWD specifications.
2. Payment shall be made as per actual measurement at site of work.
3. No T&P shall be issued.
4. Conditional quotations shall be liable to rejection.
5. For any disputes the matter shall be referred to SE-I DUSIB for final decision and the same shall be binding upon both the parties.
6. Statutory recoveries shall be deducted from the bills of contractor as per rules.
7. Work shall be completed to the satisfaction of Engineer-in-charge.
8. Debarred/blacklisted agencies shall not be permitted to submit quotations.


06/07/2018
EXECUTIVE ENGINEER,C-1

NOTICE BOARD

Publication on DUSIB Website

DELHI URBAN SHELTER IMPROVEMENT BOARD
GOVT. OF NCT OF DELHI
OFFICE OF THE EXECUTIVE ENGINEER C-1

NOW :- PAY & USE JSC

Sub Head :- Construction of Ramp and Miscellaneous work in JSCs of AC-31, Vikaspuri.

S. No.	Ref. to DSR 2016	Item	Qty	Unit	Rate	Rate in words	Amount
1	2	3	4	5	6	7	8
1	15.7.4	Demolishing brick work manually / by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in - Charge : In cement mortar	0.73	cum	842.75	Rupees Eight Hundred FortyTwo Paise SeventyFive Only	615.21
2	16.64	Providing and laying 75 mm thick compacted bed of dry brick aggregate of 40 mm thick nominal size including spreading, well ramming, consolidating and grouting with jamuna sand including finishing smooth etc. complete as per direction of Engineer-in- charge	33.79	Sqm	141.35	Rupees One Hundred FourtyOne Paise ThirtyFive Only	4776.22
3	6.1.2	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth inCement mortar 1:6 (1 cement : 6 coarse sand)	0.73	cum	4751.65	Rupees Four Thousand Seven Hundred FiftyOne Paise SixtyFive Only	3468.70
4	19.6.4	Providing and laying non - pressure NP2 class (light duty) R.C.C pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 Cement : 2 fine sand) including testing of joints etc. complete : 300 mm dia R.C.C. pipe	2.30	metre	518.55	Rupees Five Hundred Eighteen Paise FiftyFive Only	1192.67
5	13.4.2	12 mm cement plaster of mix: 1:6 (1 cement : 6 coarse sand)	7.44	sqm	168.25	Rupees One Hundred SixtyEight Paise TwentyFive Only	1251.78
6	13.18	Neat cement punning	7.44	sqm	42.60	Rupees FourtyTwo Paise Sixty Only	316.94
7	4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering . All work upto plinth level.1:2:4(1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	3.37	cum	5481.95	Rupees Five Thousand Four Hundred EightyOne Paise NinetyFive Only	18474.17
8	18.55.1	Providing and fixing P.T.M.T stop cock of approved qualitycolour and make : 15 mm nominal size 86 mm long weighing not less than 88 gms.	8	each	103.30	Rupees One Hundred Three Paise Thirty Only	826.40

17.1	Constructing brick masonry road gully chamber 50 X 45 X 60 cm with bricks designation 75 in cement mortar 1:4 (1 cement : 4 coarse sand) including 500 X 450 mm precast R.C.C horizontal grating with frame complete as per standard design : With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	1.00	each	4043.10	Rupees Four Thousand FourtyThree Paise Ten Only	4043.10
2.1	Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litres low level white P.V.C. flushing cistern with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete including cutting and making good the walls and floors wherever required : W.C. pan with ISI marked white solid plastic seat and lid	1	each	3418.70	Rupees Three Thousand Four Hundred Eighteen Paise Seventy Only	3,418.70
5.2	Steel work welded in built up sections / framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required.: In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	71.46	kg	85.95	Rupees EightyFive Paise NinetyFive Only	6,141.99
1.1	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : Two or more coats on new work	4.39	sqm	78.40	Rupees SeventyEight Paise Fourty Only	344.18
5.6	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial 'lead, for all leads including all lifts involved.	4.00	cum	120.55	Rupees One Hundred Twenty Paise FiftyFive Only	482.20

	Total	Rs 45352.25
Add 12.75 % as per GNCTD		Rs 5782.41
		Rs 51134.67
Deduct 9.5% as per GNCTD		Rs -4857.79
		Rs 46276.87
Add 1% Cotingencies		Rs 462.76874
Add 1% Labourress		Rs 462.76874
		Rs 47202.41

47202/-